

K 4140 3D

for lightweight PVCu entrance doors and side entrance doors with angular fixing cams



Product features



- for overlap thicknesses 18-22 mm
- door part with angular fixing cams for extremely high pull-out strength
- 3D adjustment (side $\pm 5,0$ mm, height $+ 5,0/- 1,0$ mm, compression $\pm 2,0$ mm)
- with integral security pin
- maintenance-free slide bearings

Technical data

Property	Value
Load capacity	80,0 kg
Knuckle length	100,0 mm
Knuckle Diameter	21,0 mm
Pin diameter	8,0 mm

Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).

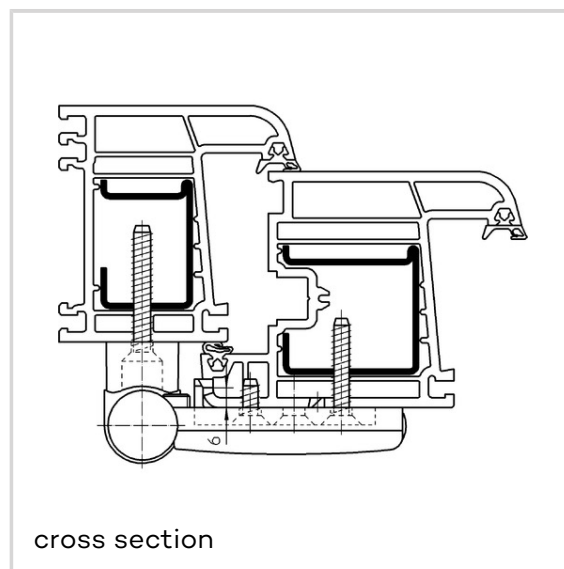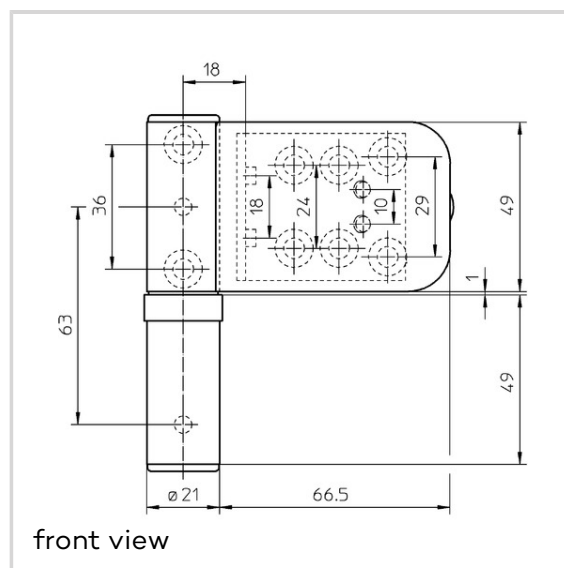

SIKU - K 4140 3D**Installation tools**

Telescope jig SIKU Series

K4 Type 3

Drilling jig SIKU Series K4

simultaneous fixing Type 3

Item versions

Finish	RAL 9016 Traffic White (SW 070)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 190830 0 07003
EAN	4015471090272
Finish	RAL 9016 Traffic White (SW 070)
VPE	pack of 12
DIN	DIN right and left hand
Article number	5 190830 0 07023
EAN	4015471086824
Finish	H9 Brown (SW 071)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 190830 0 07103
EAN	4015471090289
Finish	H9 Brown (SW 071)
VPE	pack of 12
DIN	DIN right and left hand
Article number	5 190830 0 07123
EAN	4015471086831
Finish	RAL 9005 Matte Black (SW 107)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 190830 0 10703
EAN	4015471129675

SIKU - K 4140 3D

Finish	RAL 9005 Matte Black (SW 107)
VPE	pack of 12
DIN	DIN right and left hand
Article number	5 190830 0 10723
EAN	4015471144746

Finish	RAL 9006 White Alu, clear lc (SW 204)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 190830 0 20403
EAN	4015471135812