

## K 4345 3D

for lightweight PVCu doors for flexible fixing



### Product features


- for overlap thicknesses 24-28 mm
- door part for flexible fixing
- 3D adjustment (side  $\pm 5,0$  mm, height  $+ 5,0/- 1,0$  mm, compression  $\pm 2,0$  mm)
- with integral security pin
- maintenance-free slide bearings

### Technical data


| Property         | Value    |
|------------------|----------|
| Load capacity    | 80,0 kg  |
| Knuckle length   | 100,0 mm |
| Knuckle Diameter | 21,0 mm  |
| Pin diameter     | 8,0 mm   |

### Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).

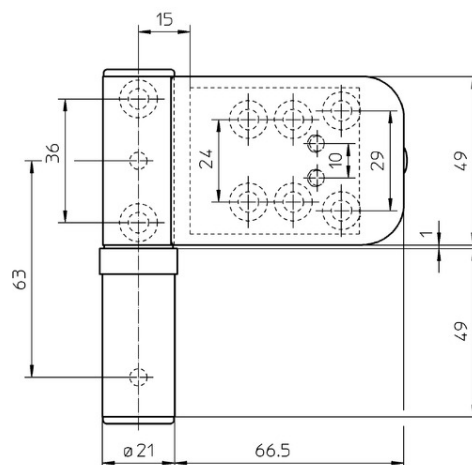

front view

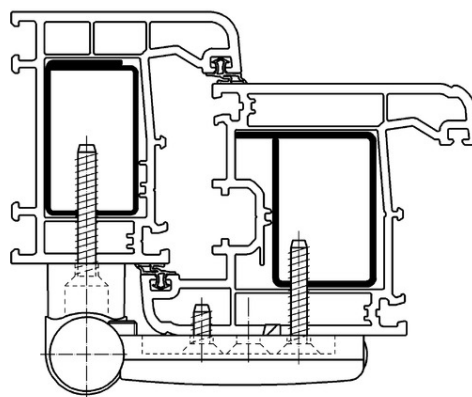

cross section

---

**SIKU - K 4345 3D****Installation tools**

---

Drilling jig SIKU Series K4  
simultaneous fixing Type 4

**Item versions**

---

|                |                                    |
|----------------|------------------------------------|
| Finish         | RAL 9016 Traffic<br>White (SW 070) |
| VPE            | pack of 3                          |
| DIN            | DIN right and left hand            |
| Article number | 5 190880 0 07003                   |
| EAN            | 4015471090371                      |